

**MM54C901/MM74C901 Hex Inverting TTL Buffer**  
**MM54C902/MM74C902 Hex Non-Inverting TTL Buffer**  
**MM54C903/MM74C903 Hex Inverting CMOS Buffer**  
**MM54C904/MM74C904 Hex Non-Inverting CMOS Buffer**

**General Description**


These hex buffers employ complementary MOS to achieve wide supply operating range, low power consumption, and high noise immunity. These buffers provide direct interface from PMOS into CMOS or TTL and direct interface from CMOS to TTL or CMOS operating at a reduced  $V_{CC}$  supply.

**Features**

- Wide supply voltage range 3.0V to 15V
- Guaranteed noise margin 1.0V
- High noise immunity 0.45  $V_{CC}$  (typ.)
- TTL compatibility Fan out of 2 driving standard TTL

**Connection Diagrams**


Dual-In-Line Package  
 MM54C901/MM74C901  
 MM54C903/MM74C903

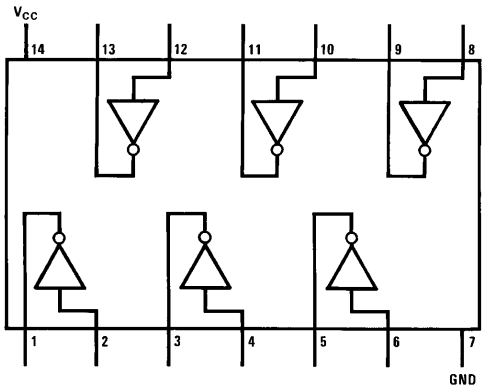

Top View

Order Number MM54C901,  
 MM74C901, MM54C903 or MM74C903

Dual-In-Line Package  
 MM54C902/MM74C902  
 MM54C904/MM74C904

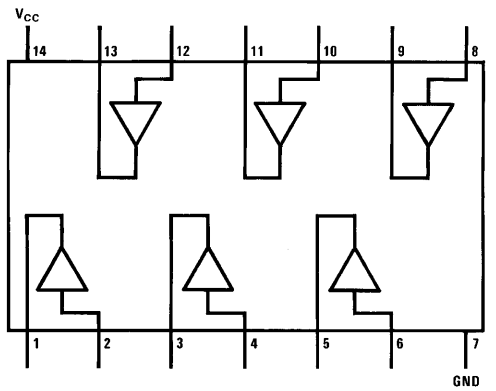

Top View

Order Number MM54C902,  
 MM74C902, MM54C904 or MM74C904

**MM54C901/MM74C901 (TTL), MM54C903/MM74C903 (CMOS) Hex Inverting Buffer**  
**MM54C902/MM74C902 (TTL), MM54C904/MM74C904 (CMOS) Hex Non-Inverting Buffer**

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Voltage at Any Pin	-0.3V to $V_{CC} + 0.3V$
Voltage at Any Input Pin	
MM54C901/MM74C901	-0.3V to +15V
MM54C902/MM74C902	-0.3V to +15V
MM54C903/MM74C903	$V_{CC} - 17V$ to $V_{CC} + 0.3V$
MM54C904/MM74C904	$V_{CC} - 17V$ to $V_{CC} + 0.3V$
Storage Temperature Range ( $T_S$ )	-65°C to +150°C
Power Dissipation ( $P_D$ )	
Dual-In-Line	700 mW
Small Outline	500 mW

Operating Temperature Range ( $T_A$ )	
MM54C901, MM54C902, MM54C903, MM54C904	-55°C to +125°C
MM74C901, MM74C902, MM74C903, MM74C904	-40°C to +85°C
Operating $V_{CC}$ Range	3.0V to 15V
Absolute Maximum $V_{CC}$	18V
Lead Temperature ( $T_L$ ) (Soldering, 10 seconds)	260°C

## DC Electrical Characteristics Min/Max limits apply across temperature range unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>CMOS TO CMOS</b>						
$V_{IN(1)}$	Logical "1" Input Voltage	$V_{CC} = 5.0V$ $V_{CC} = 10V$	3.5 8.0			V V
$V_{IN(0)}$	Logical "0" Input Voltage	$V_{CC} = 5.0V$ $V_{CC} = 10V$			1.5 2.0	V V
$V_{OUT(1)}$	Logical "1" Output Voltage	$V_{CC} = 5.0V, I_O = -10 \mu A$ $V_{CC} = 10V, I_O = -10 \mu A$	4.5 9.0			V V
$V_{OUT(0)}$	Logical "0" Output Voltage	$V_{CC} = 5.0V$ $V_{CC} = 10V$			0.5 1.0	V V
$I_{IN(1)}$	Logical "1" Input Current	$V_{CC} = 15V, V_{IN} = 15V$		0.005	1.0	$\mu A$
$I_{IN(0)}$	Logical "0" Input Current	$V_{CC} = 15V, V_{IN} = 0V$	-1.0	-0.005		$\mu A$
$I_{CC}$	Supply Current	$V_{CC} = 15V$		0.05	15	$\mu A$
<b>TTL TO CMOS</b>						
$V_{IN(1)}$	Logical "1" Input Voltage	54C $V_{CC} = 4.5V$ 74C $V_{CC} = 4.75V$	$V_{CC} - 1.5$ $V_{CC} - 1.5$			V V
$V_{IN(0)}$	Logical "0" Input Voltage	54C $V_{CC} = 4.5V$ 74C $V_{CC} = 4.75V$			0.8 0.8	V V
<b>CMOS TO TTL</b>						
$V_{IN(1)}$	Logical "1" Input Voltage MM54C901, MM54C903 MM54C902, MM54C904 MM74C901, MM74C903 MM74C902, MM74C904	$V_{CC} = 4.5V$ $V_{CC} = 4.5V$ $V_{CC} = 4.75V$ $V_{CC} = 4.75V$	4.0 $V_{CC} - 1.5$ 4.25 $V_{CC} - 1.5$			V V V V
$V_{IN(0)}$	Logical "0" Input Voltage MM54C901, MM54C903 MM54C902, MM54C904 MM74C901, MM74C903 MM74C902, MM74C904	$V_{CC} = 4.5V$ $V_{CC} = 4.5V$ $V_{CC} = 4.75V$ $V_{CC} = 4.75V$			1.0 1.5 1.0 1.5	V V V V
$V_{OUT(1)}$	Logical "1" Output Voltage	54C $V_{CC} = 4.5V, I_O = -800 \mu A$ 74C $V_{CC} = 4.75V, I_O = -800 \mu A$	2.4 2.4			V V
$V_{OUT(0)}$	Logical "0" Output Voltage MM54C901, MM54C903 MM54C902, MM54C904 MM74C901, MM74C903 MM74C902, MM74C904	$V_{CC} = 4.5V, I_O = 2.6 mA$ $V_{CC} = 4.5V, I_O = 3.2 mA$ $V_{CC} = 4.75V, I_O = 2.6 mA$ $V_{CC} = 4.75V, I_O = 3.2 mA$			0.4 0.4 0.4 0.4	V V V V

## DC Electrical Characteristics (Continued)

Min/Max limits apply across temperature range unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>OUTPUT DRIVE (See 54C/74C Family Characteristics Data Sheet) (Short Circuit Current)</b> <b>(MM54C901/MM74C901, MM54C903/MM74C903)</b>						
I <sub>SOURCE</sub>	Output Source Current (P-Channel)	V <sub>CC</sub> = 5.0V, V <sub>OUT</sub> = 0V T <sub>A</sub> = 25°C, V <sub>IN</sub> = 0V	-5.0			mA
I <sub>SOURCE</sub>	Output Source Current (P-Channel)	V <sub>CC</sub> = 10V, V <sub>OUT</sub> = 0V T <sub>A</sub> = 25°C, V <sub>IN</sub> = 0V	-20			mA
I <sub>SINK</sub>	Output Sink Current (N-Channel)	V <sub>CC</sub> = 5.0V, V <sub>OUT</sub> = V <sub>CC</sub> T <sub>A</sub> = 25°C, V <sub>IN</sub> = V <sub>CC</sub>	9.0			mA
I <sub>SINK</sub>	Output Sink Current (N-Channel)	V <sub>CC</sub> = 5.0V, V <sub>OUT</sub> = 0.4V T <sub>A</sub> = 25°C, V <sub>IN</sub> = V <sub>CC</sub>	3.8			mA
<b>(MM54C902/MM74C902, MM54C904/MM74C904)</b>						
I <sub>SOURCE</sub>	Output Source Current (P-Channel)	V <sub>CC</sub> = 5.0V, V <sub>OUT</sub> = 0V T <sub>A</sub> = 25°C, V <sub>IN</sub> = V <sub>CC</sub>	-5.0			mA
I <sub>SOURCE</sub>	Output Source Current (P-Channel)	V <sub>CC</sub> = 10V, V <sub>OUT</sub> = 0V T <sub>A</sub> = 25°C, V <sub>IN</sub> = V <sub>CC</sub>	-20			mA
I <sub>SINK</sub>	Output Sink Current (N-Channel)	V <sub>CC</sub> = 5.0V, V <sub>OUT</sub> = V <sub>CC</sub> T <sub>A</sub> = 25°C, V <sub>IN</sub> = 0V	9.0			mA
I <sub>SINK</sub>	Output Sink Current (N-Channel)	V <sub>CC</sub> = 5.0V, V <sub>OUT</sub> = 0.4V T <sub>A</sub> = 25°C, V <sub>IN</sub> = 0V	3.8			mA

## AC Electrical Characteristics\* T<sub>A</sub> = 25°C, C<sub>L</sub> = 50 pF, unless otherwise noted

Symbol	Parameter	Conditions	Min	Typ	Max	Units
<b>MM54C901/MM74C901, MM54C903/MM74C903</b>						
t <sub>pd1</sub>	Propagation Delay Time to a Logical "1"	V <sub>CC</sub> = 5.0V		38	70	ns
		V <sub>CC</sub> = 10V		22	30	ns
t <sub>pd0</sub>	Propagation Delay Time to a Logical "0"	V <sub>CC</sub> = 5.0V		21	35	ns
		V <sub>CC</sub> = 10V		13	20	ns
C <sub>IN</sub>	Input Capacitance	Any Input (Note 2)		14		pF
C <sub>PD</sub>	Power Dissipation Capacity	(Note 3) Per Buffer		30		pF
<b>MM54C902/MM74C902, MM54C904/MM74C904</b>						
t <sub>pd1</sub>	Propagation Delay Time to a Logical "1"	V <sub>CC</sub> = 5.0V		57	90	ns
		V <sub>CC</sub> = 10V		27	40	ns
t <sub>pd0</sub>	Propagation Delay Time to a Logical "0"	V <sub>CC</sub> = 5.0V		54	90	ns
		V <sub>CC</sub> = 10V		25	40	ns
C <sub>IN</sub>	Input Capacitance	Any Input (Note 2)		5.0		pF
C <sub>PD</sub>	Power Dissipation Capacity	(Note 3) Per Buffer		50		pF

\*AC Parameters are guaranteed by DC correlated testing.


**Note 1:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of "Electrical Characteristics" provides conditions for actual device operation.

**Note 2:** Capacitance is guaranteed by periodic testing.

**Note 3:** C<sub>PD</sub> determines the no load AC power consumption of any CMOS device. For complete explanation see 54C/74C Family Characteristics application note AN-90.


## Logic Diagrams

**MM54C901/MM74C901**  
CMOS to TTL Inverting Buffer




TL/F/5909-3

**MM54C903/MM74C903**  
PMOS to TTL or CMOS Inverting Buffer




TL/F/5909-4

**MM54C902/MM74C902**  
CMOS to TTL Buffer

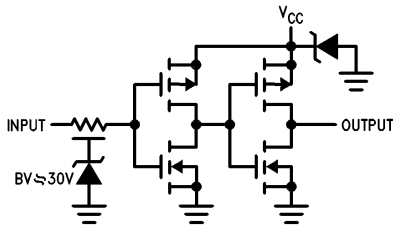

TL/F/5909-5


**MM54C904/MM74C904**  
PMOS to TTL or CMOS Buffer

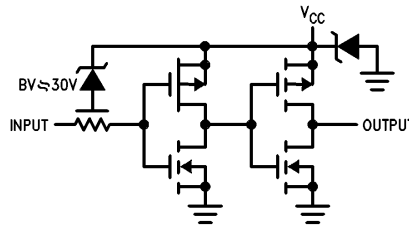

TL/F/5909-6


## Typical Applications

**PMOS to CMOS or TTL Interface**

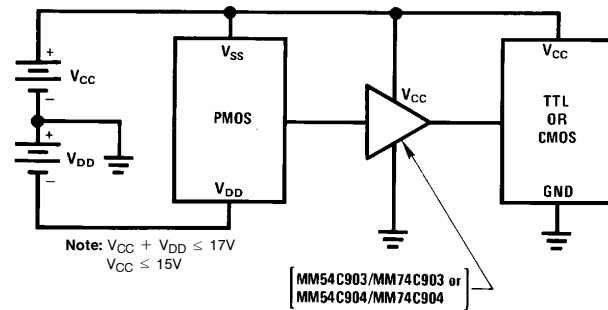


TL/F/5909-7

**CMOS to TTL or CMOS at a Lower VCC**

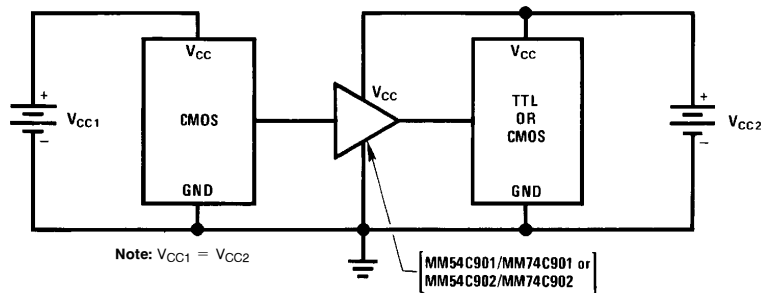


TL/F/5909-8

## AC Test Circuit and Switching Time Waveforms



Note: Delays measured with input  $t_r$ ,  $t_f = 20$  ns.


TL/F/5909-9

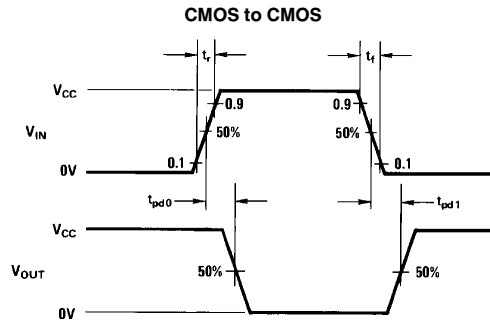

TL/F/5909-10


## Typical Performance Characteristics

Typical Propagation Delay to a Logical "0" for the MM54C901/MM74C901 and MM54C903/MM74C903




TL/F/5909-11

Typical Propagation Delay to a Logical "1" for the MM54C901/MM74C901 and MM54C903/MM74C903




TL/F/5909-13

Typical Propagation Delay to a Logical "0" for the MM54C902/MM74C902 and MM54C904/MM74C904




TL/F/5909-14

Typical Propagation Delay to a Logical "1" for the MM54C902/MM74C902 and MM54C904/MM74C904




TL/F/5909-12

**Physical Dimensions** inches (millimeters)

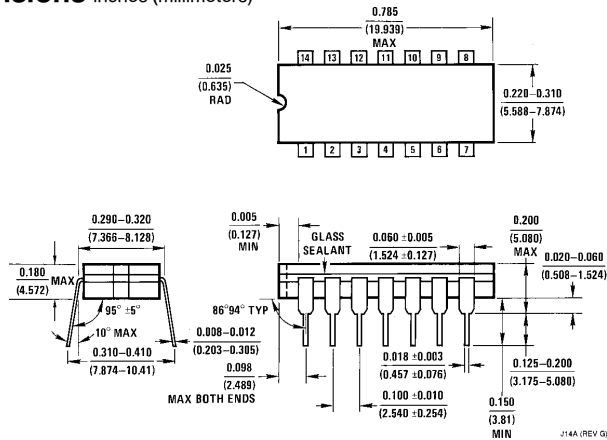

**Ceramic Dual-In-Line Package (J)**  
 Order Number MM54C901J, MM74C901J, MM54C902J,  
 MM74C902J, MM54C903J, MM74C903J, MM54C904J or MM74C904J  
 NS Package Number J14A

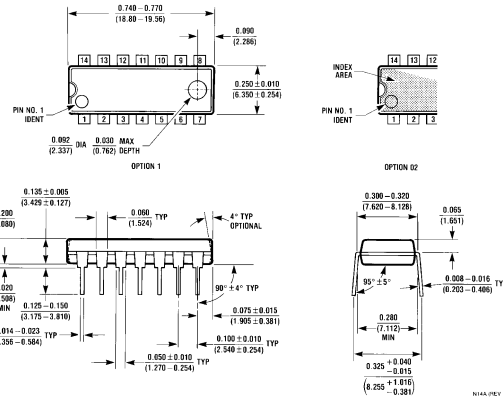

**Molded Dual-In-Line Package (N)**  
 Order Number MM54C901N, MM74C901N, MM54C902N,  
 MM74C902N, MM54C903N, MM74C903N, MM54C904N or MM74C904N  
 NS Package Number N14A

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: (800) 272-9959  
 Fax: (800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.