

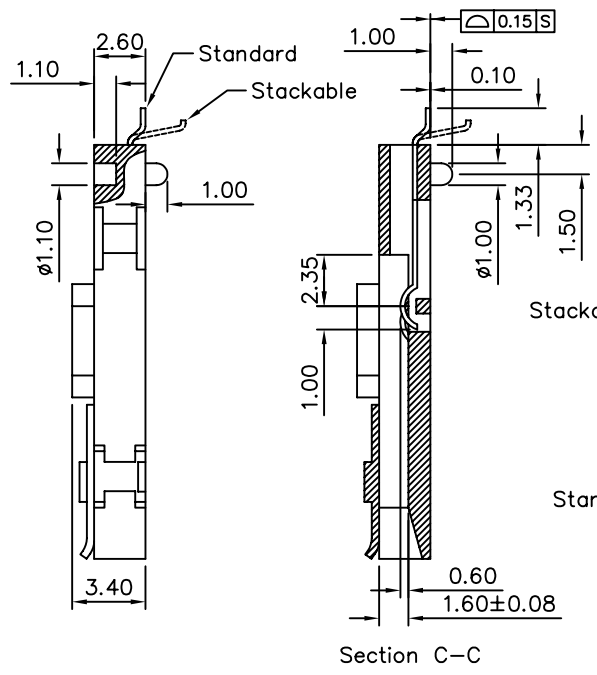


Recommended P.C.B Layout (Top View)
Tolerance: ±0.10mm

SPECIFICATIONS
 Current Rating: 1A Max.
 Contact Resistance: 100 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Mating Cycle: 5000 Cycles Min.
 Operating Temperature: -40°C To +85°C
 Insulator: LCP, Rated UL 94V-0
 Contacts: Phosphor Bronze
 Boardlock: Copper Alloy
 Contact Area: Gold Flash Plating Over
 40u" Nickel
 Solder Tail Area: 100u" Tin Plating Over
 40u" Nickel

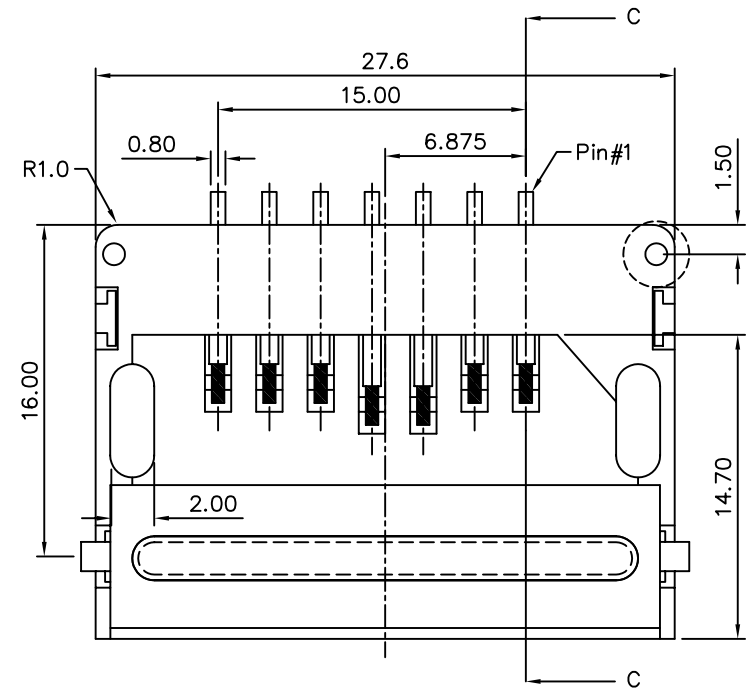

Section C-C

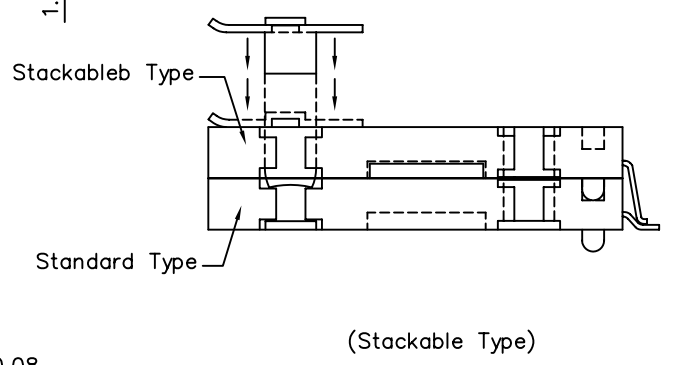

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | | | | | | |
|--------------------|------|------------------|----|--|----|----------|-------------|-------|------------|
| CATEGORY | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. | | | | | |
| PART No. MMC07W | | MEI | | | | | | | |
| DRAWING No. MMC07W | | CHECKED BY BECKY | | | | | | | |
| | | DRAWING BY HZF | | | | | | | |
| SCALE | NONE | REV. | A0 | UNIT | mm | △ A0 | NEW RELEASE | BECKY | 02/04/2005 |
| | | | | | | NO. REV. | REVISIONS | CHK | DATE |