

SOUND PRESSURE LEVEL

80dB min. at 1.2KHz / 9Vp-p
Square Wave / 10cm
70dB min. at 1.2KHz / 1Vrms
Sine Wave / 10cm

CAPACITANCE

47,000pF ± 30% at 120Hz

ALLOWABLE INPUT VOLTAGE

40Vp-p max.

CURRENT CONSUMPTION

3mA max. at 1.2KHz / 9Vp-p
Square Wave

CASE MATERIAL

ABS (UL 94HB)

LEAD WIRE

UL 1095 AWG28
110mm ± 5.0mm

LEAD PIN MATERIAL

OPERATING TEMP. RANGE

-20°C to + 60°C

STORAGE TEMP. RANGE


-30°C to + 70°C

WEIGHT

量 重

5.3gms

Dimensions (Unit: mm ± 0.5)

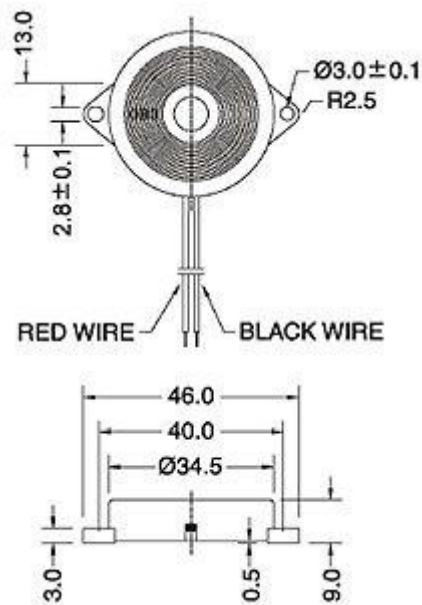

Sound Pressure Level vs. Frequency

