
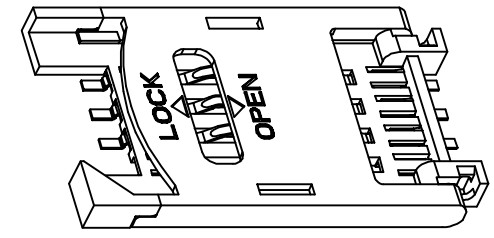
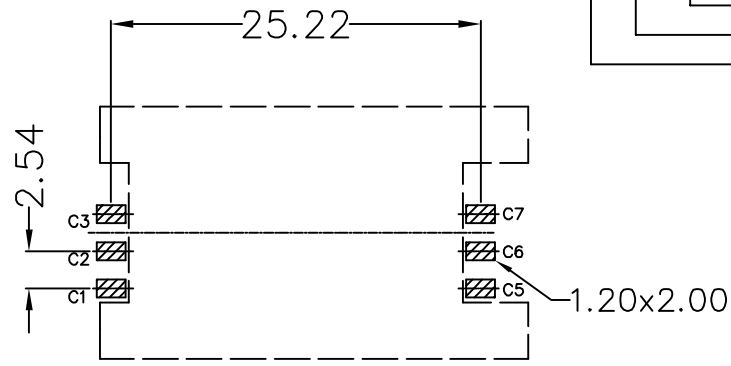
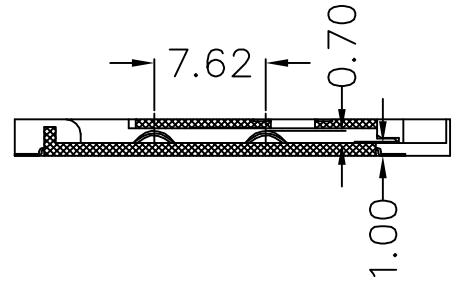



SPECIFICATIONS

Housing: Thermoplastic (UL94 V-0)
 Terminal: Phosphor Bronze, Gold Plating On Contact Area,
 Tin Plating On Solder Tail.
 Current Rating: 0.5A Max.
 Dielectric Withstanding Voltage: 500V AC R.M.S. For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At DC 500V
 Contact Resistance: 50 milliohms Max.
 Durability: 5000 Cycles
 Manual Soldering: 360°C, 3 Sec. Max.
 Vapor Phase: 215°C, 30 Sec. Max.
 IR Reflow: 260°C, 15 Sec. Max.
 Operation Temperature: -25°C To +85°C
 RoHS Compliant
 Part No:

- SC V - W 06 A 25- 020 C- H
- RoHS Compliant
 - Without Peg & Switch
 - Selective Gold(Gold Flash)
 - Base Height,2.5mm
 - Row Pitch, 25.22mm
 - No. of Pins,6Pins
 - SMT, Right Angle Type(90°)
 - Hinged Cover
 - Smart Card/Sim Card

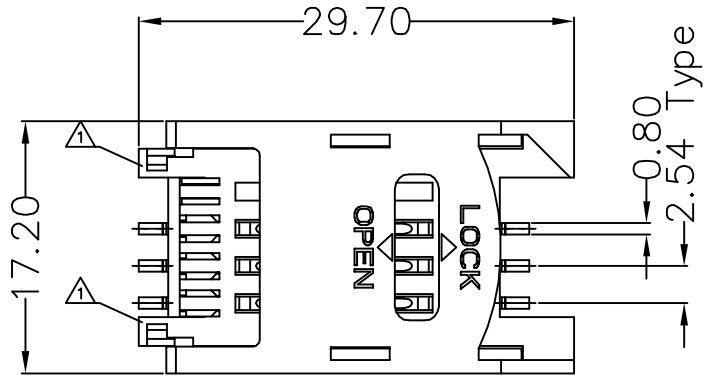

(.XX±0.05)
REFERENCE PCB LAYOUT

CATEGORY SMART CARD/SIM CARD		APPROVED BY VIVAN		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG. ±1°
PART No. SCV-W06A25-020C-H		CHECKED BY LYS		
DRAWING No. SCV-W06A25-020C-H		DRAWING BY XSH		
SCALE	NONE	REV.	A2	
UNIT mm				NO. REV.

△ A2	ADD CHAMFER	XSH	01/08-2008
△ A1	MODIFIED AXES	XSH	09/26-2007
△ A0	NEW RELEASE	XSH	01/04-2007
NO. REV.	REVISIONS	CHK	DATE