


SPECIFICATIONS :
 RATING : 30mA / 28VDC
 OPERATING SPEED: 10mm/sec
 ELECTRIC LIFE : 20,000 CYCLES
 FORCE 1 : 5-7N
 FORCE 2 : 11-14N
 OPERATING POSITION 1 : 9.7 ± 0.2 mm
 OPERATING POSITION 2 : 8.9 ± 0.2 mm
 FULL TRAVELS : 2.0mm

MATERIALS :
 PUSHER : POM BLACK
 DUST PROTETION CAP : POM BLACK
 CASE : PA NATURE GLASS FIBER REINFORCED
 SPRING : PIANO WIRE
 ① CONTACT/TERMINALS : BRASS, SLIVER PLATED.

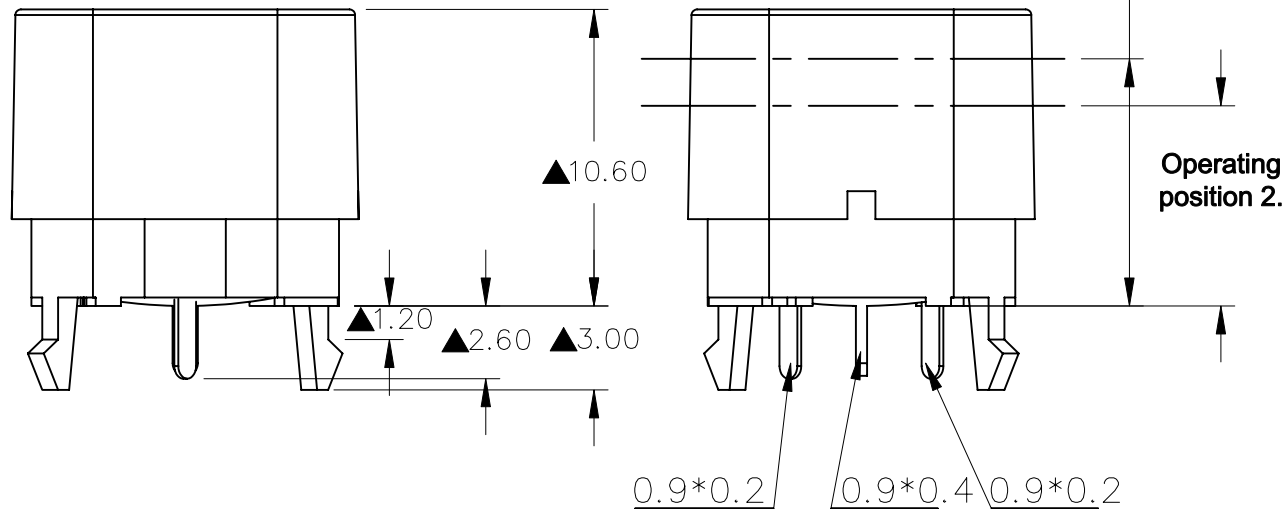

符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 3 : 2	TITLE 圖 名	2-STAGE SWITCH		SIZE 圖紙	A4
1	①	CONTACT/TERMINALS規格變更	FEB-28-2007	TOLERANCE (公差) : 0.00 mm \pm 0.25mm 0.0 mm \pm 0.40mm ANGULAR : $\pm 2^\circ$ FILE NAME : SS1212-2	DWG NO. 圖 號	SS1212-2 / 4		UNIT 單位	mm
2	②				REV. 版本	02	DATE 日期	OCT - 30 - 2007	SHEET 張 數
3	③				CHECKED BY 審 核	MICHAEL		DRAWN BY 製 圖	EMMA
4	④								
5	⑤								

版本 : B

MD-3064