



ISSUE 1; December 2012 - RoHS 2011/65/EU



Description

- Please note: This document is intended to illustrate the general capability and versatility of IQD's design. For specific enquiries please contact one of IQD's Sales Offices where we can tailor a unique specification to meet your needs.
- Low phase noise optimised design.
- High stability.
- Low ageing.
- Tuning range also available.

Frequency Range

- Frequency 2.0 to 80.0Mhz
- Frequency Stability ±1.00ppm

Operating Temperature Ranges

- -20 to 70°C
- -40 to 85°C

Frequency Parameters

- Developed Frequencies: 12.80MHz 50.0MHz
- For other frequency/specification combinations, please contact an IQD Sales Office
- Frequency Stability vs Temperature Range: Tightest Stability: ±1ppm -20 to 70°C Widest Temperature Range: ±2ppm -40 to 85°C
- Typical Ageing @ 50MHz: ±0.8ppm in the 1st year, ±3.5ppm after 15 years

Frequency Adjustment

- Frequency Adjustment Range: ±5ppm to ±15ppm (optional)

Noise Parameter

- Typical Phase Noise Figures @ 50MHz (dBc/Hz):

100Hz	1kHz	10kHz	100kHz
-105	-130	-145	-150

Environmental Parameters


- Environmental testing taken from IEC 60068
Please contact an IQD Sales Office for full details
- Storage Temperature Range: -55 to 105°C

Ordering Information


- Minimum Enquiry Information:
 Frequency
 Model
 Supply Voltage
 Output
 Frequency Stability (over operating temperature range)
 Operating Temperature Range
 Frequency Adjustment

Packing Details

- Pack Style: **Bulk** Supplied tube or box packaging
Pack Size 1
- Pack Style: **Reel** Tape and reel in accordance with EIA-481-D
Pack Size 75
- Alternative packing options available

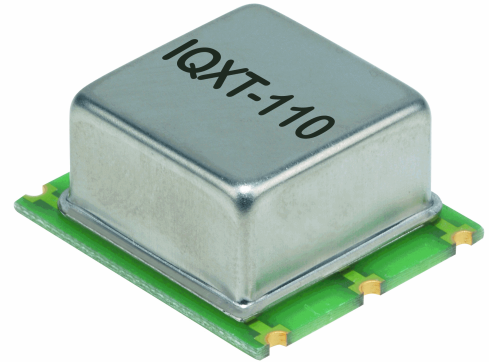

Outline (mm)

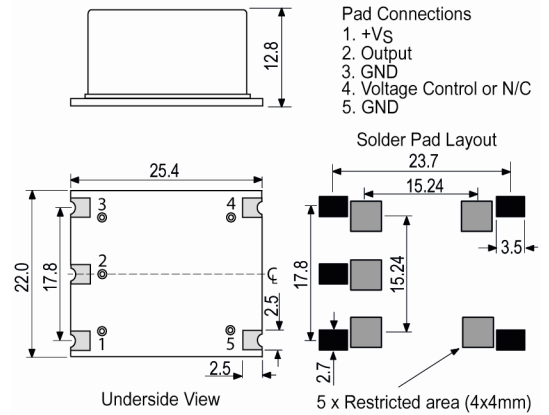

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0)408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com