



# POWER BIPOLAR

## FAST SWITCHING TRANSISTORS AND DARLINGTONS

Internal schematic diagrams

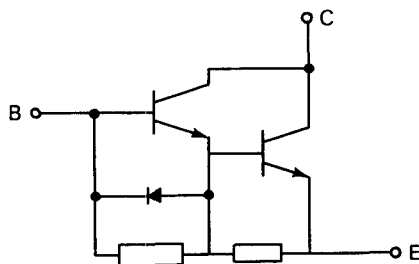

Bipolar transistors

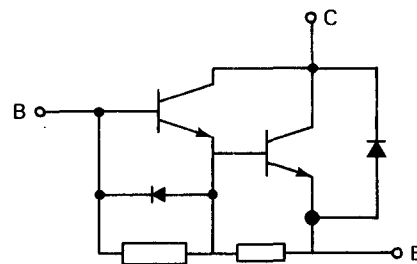

Darlingtons except BUD 48 DI

Darlington BUD 48 DI

### 120 / 300 V V<sub>CBO</sub> RANGE

I <sub>C</sub> (A)	V <sub>CBO</sub> (V)	V <sub>CEO</sub> (V)	P <sub>tot</sub> (W)	Package	Type NPN	V <sub>CE(sat)</sub> @		I <sub>C</sub> (A)	I <sub>B</sub> (A)	t <sub>r</sub> t <sub>d</sub> + t <sub>r</sub> <sup>*</sup> (1) max (μs)	t <sub>sj</sub> t <sub>s</sub> <sup>*</sup> max (μs)	t <sub>ff</sub> t <sub>f</sub> <sup>*</sup> max (μs)
						max (V)						
4	200	125	31	TO 220	D44 Q1	1		2	0.2	0.4	2 * (1)	1.7 * (1)
4	250	175	31	TO 220	D44 Q3	1		2	0.2	0.4	2 * (1)	1.7 * (1)
4	300	225	31	TO 220	D44 Q5	1		2	0.2	0.4	2 * (1)	1.7 * (1)
10	160	125	106	SOT 93	BUX 10 P	0.6		10	1	1.5	1.2 * (1)	0.3 * (1)
12	240	120	85	TO 220	BUV 27	0.7		4	0.4	0.8*	2 *	0.15*
14	180	90	85	TO 220	BUV 26	1.5		12	1.2	0.6*	2 *	0.15* (1)
15	200	125	125	TO 220	BUT 60	0.9		24	2.4	—	1.5	0.2
15	300	200	120	TO 3	BUV 41	1.2		8	1	0.5	2	0.3
15	300	200	125	SOT 93	BUW 91	0.9		6	0.6	0.5	2	0.3
20	220	160	150	TO 3	BUX 11 N	0.6		8	0.8	1.5	1.5 * (1)	0.5 * (1)
20	250	125	120	TO 3	BUV 40	1.2		15	1.9	1	1.7	0.3
20	250	125	125	SOT 93	BUW 90	0.9		11	1.1	1	1.7	0.3
20	250	200	150	TO 3	BUX 11	0.6		6	0.6	1	1.8 * (1)	0.4 * (1)
20	300	200	150	SOT 93	BUW 51	0.9		10	1	0.6	2	0.3
20	300	200	150	TO 3	BUV 51	1.2		14	1.75	0.6	2	0.3
20	300	250	150	TO 3	BUX 12	1		5	0.5	1	2 * (1)	0.5 * (1)
25	160	90	120	TO 3	BUV 39	1.2		20	2.5	1.1	1.7	0.3
25	160	90	125	SOT 93	BUW 89	0.9		15	1.5	1.1	1.7	0.3
25	160	125	150	TO 3	BUX 10	0.6		10	1	1.5	1.2 * (1)	0.3 * (1)
25	250	125	150	SOT 93	BUW 50	0.9		20	2	0.6	1.7	0.3
25	250	125	150	TO 3	BUV 50	1.2		24	3	0.6	1.7	0.3
30	120	60	150	SOT 93	BUW 48	1.4		40	4	1.5*	1.65*	0.5 *
30	120	60	150	TO 3	BUW 38	1.4		40	4	1.5*	1.65*	0.5 *
30	160	80	150	SOT 93	BUW 49	1.2		30	3	1.2*	1.65*	0.5 *
30	160	80	150	TO 3	BUW 39	1.2		30	3	1.2*	1.65*	0.5 *
40	200	125	115	TOP 3 I	BUT 70 I	0.9		70	7	—	1.8	0.2
40	200	125	200	SOT 93	BUT 70	0.9		70	7	—	1.8	0.2
40	250	125	100	TOP 3 I	BUW 60 I	0.9		50	5	—	1.5	0.25
40	250	125	175	SOT 93	BUW 60	0.9		50	5	—	1.5	0.25
40	250	200	250	TO 3	BUV 21	0.6		12	1.2	1.2*	1.8 * (1)	0.4 * (1)
40	250	200	250	TO 3	BUX 21	1.5		25	3	1.2*	1.8 * (1)	0.4 * (1)
40	300	200	100	TOP 3 I	BUW 61 I	0.9		25	2.5	—	2.4	0.25
40	300	200	100	TOP 3 I	BUT 71 I	0.9		40	4	—	2.4	0.25
40	300	200	175	SOT 93	BUT 71	0.9		40	4	—	2.4	0.25
40	300	200	175	SOT 93	BUW 61	0.9		25	2.5	—	2.4	0.25
40	300	250	250	TO 3	BUV 22	0.6		25	2.5	1.3	2 * (1)	0.5 * (1)
40	300	250	350	TO 3	BUX 22	1.5		20	2.5	1.3*	2 * (1)	0.5 * (1)
47	120	60	250	TO 3	BUV 18	1.5		80	8	1.5*	1.7 *	0.5 *
47	160	80	250	TO 3	BUV 19	1.2		60	6	1.3*	1.7 *	0.5 *
50	160	125	250	TO 3	BUV 20	0.6		25	2.5	1.5	1.2 * (1)	0.3 * (1)
50	160	125	350	TO 3	BUX 20	1.2		50	5	1.5*	1.2 * (1)	0.3 * (1)
50	200	125	250	TO 3	BUT 90	0.9		70	7	1.2*	2 (1)	0.3 (1)
50	200	125	300	TO 3	BUT 100	0.9		100	10	—	2	0.2
50	250	125	250	TO 3	BUV 60	1.2		60	7.5	0.8	1.5	0.25
50	300	200	250	TO 3	BUV 61	1.2		40	5	0.7	2.4	0.25
50	300	200	250	TO 3	BUT 91	1.2		40	4	0.8	1.5 *	0.65*
60	300	200	350	TO 3	BUR 51	1		30	2	1	2 * (1)	0.6 * (1)
70	200	125	350	TO 3	BUR 50 S	1		35	2	1.2	2 * (1)	0.5 * (1)

For switching times, T<sub>j</sub> = 100°C, unless otherwise specified.

(1) T<sub>j</sub> = 25°C